

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 February 2004 (19.02.2004)


PCT

(10) International Publication Number  
**WO 2004/014633 A1**

- (51) International Patent Classification<sup>7</sup>: **B29C 45/37** [US/US]; 33 Heckathorn Road, Brookville, OH 45309 (US).
- (21) International Application Number: PCT/US2003/024157 (74) Agents: **PEACOCK, Bruce, E.** et al.; Wegman, Hessler & Vanderburg, Suite 200, 6055 Rockside Woods Boulevard, Cleveland, OH 44131 (US).
- (22) International Filing Date: 1 August 2003 (01.08.2003)
- (25) Filing Language: English (81) Designated States (*national*): JP, US.
- (26) Publication Language: English (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- (30) Priority Data: 60/401,873 8 August 2002 (08.08.2002) US Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (71) Applicant (*for all designated States except US*): **GREEN TOKAI CO., LTD.** [US/US]; 55 Robert Wright Drive, Brookville, OH 45309-1902 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **MAKI, Renji**

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: IMPROVED SIDE SILL TRIM PART AND METHOD OF MOLDING SAME

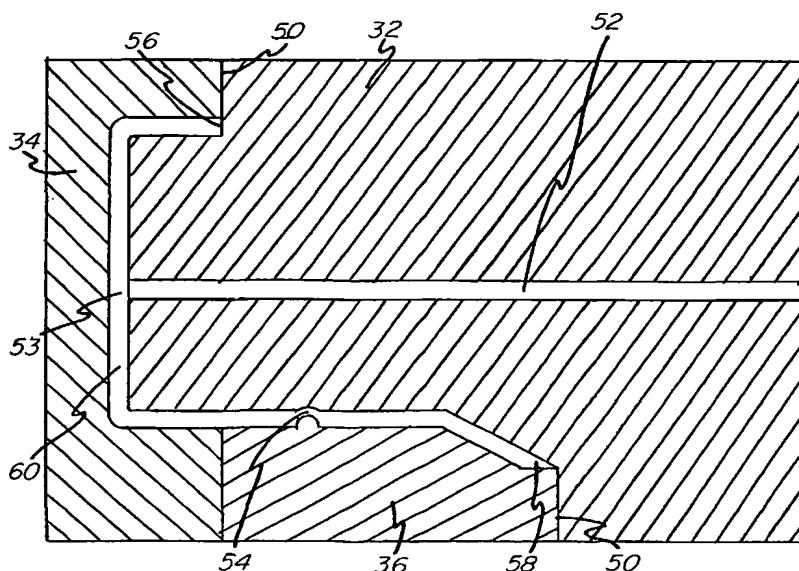

(57) Abstract: Improved side sill or rocker panel trim part and methods of molding same are provided. In the methods, a substantially "C" like cross-sectional shaped mold cavity (53) is provided having a pair of terminal cavity portions (56, 58) therein. A living hinge-forming cavity space (54) is provided between a midpoint of the cavity and one of the terminal end portions. The part comprises a longitudinal axis extending therealong and a pair of leg portions and an intermediate section interconnecting the leg portions. The part includes a substantially "C" shaped cross-section transverse to the longitudinal axis with the intermediate section including a show surface side with the legs extending away from the show surface side. A hinge joint is provided adjacent one of the legs so that the part is bendable at the hinge to form a substantially closed "C" position.